

INCAS

VALVOLA A SFERA DA INCASSO PER ACQUA
CONCEALED BALL VALVE FOR WATER




ENOLGAS
Ispirati dal passato, proiettati nel futuro.

SPECIFICA MATERIALI MATERIAL SPECIFICATION

PARTICOLARI COMPONENT

MATERIALI MATERIAL

DESCRIZIONE DESCRIPTION

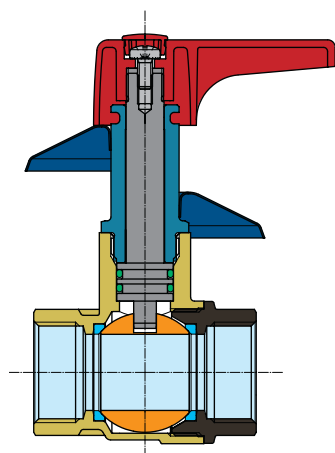

GUARDA IL VIDEO / WATCH THE VIDEO



 CORPO BODY	CW 617 N UNI EN 12165	STAMPATO DA BARRA Forged
 MANICOTTO END ADAPTER	CW 617 N UNI EN 12165	STAMPATO Forged
 SFERA BALL	CW 614 N UNI EN 12164	DA BARRA, NICHEL-CROMATA Machined, Chrome-Plated
 SEDI LATERALI BALL GASKETS	PTFE	VERGINE Virgin
 PERNO STEM	CW 614 N UNI EN 12164	DA BARRA Machined
 PREMI PERNO PRESS STEM	CW 614 N UNI EN 12164	CROMATO Chrome-Plated
 O-RINGS	ELASTOMERO Elastomer	ADATTO ALL'USO PER ACQUA Suitable For Use With Water
 VITE SCREW	ACCIAIO Steel	ZINCATA Zinc-Plated
 LEVA HANDLE	LEGA NON FERROSA Non-Ferrous Alloy	PRESSOFUSO CROMATO Die-Cast, Chrome-Plated
 ROSONE DI COPERTURA COVERING PLATE	LEGA NON FERROSA Non-Ferrous Alloy	CROMATO Chrome-Plated

FILETTATURE

Estremità filettate UNI ISO 228..

IMPIEGHI

Le valvole a sfera **INCAS** sono state progettate per le installazioni a incasso. Le valvole a sfera **INCAS** sono adatte per l'uso con acqua calda e fredda, aria compressa, oli e idrocarburi in generale. Per utilizzi speciali vedere le tabelle di compatibilità chimica.

PRESSIONE DI ESERCIZIO

PN 25.

LIMITI DI TEMPERATURA

Da -10°C a +90°C.

END CONNECTIONS Threaded ends UNI ISO 228.

APPLICATIONS

The **INCAS** ball valves are designed for wall built-in installation. They are suitable for hot and cold water, compressed air, oils and hydrocarbons in general.

For special uses please see the chemical resistance tables.

PRESSURE LIMITS

PN 25.


TEMPERATURE LIMITS

From -10°C to + 90°C.

S0160 INCAS



ERA




CODICE CODE	MISURA SIZE	PN Bar	øA	B min mm.	B max mm	C	D	E	F	SW	Box Crt
S0160C04	1/2" (DN15)	25	15	26,5	50	23,5	95	9,5	49	26	6/30
S0160C05	3/4" (DN20)	25	20	30	53	23	98	11	58,5	31	4/20
S0160C06	1" (DN25)	25	25	35	61,5	26,5	107	11,5	69	39	4/20

Valvola a sfera da incasso a passaggio totale femmina/femmina con leva, cromata.
Full bore ball valve for wall built-in installation, with lever, chrome-plated, standard line.

S0161 INCAS



ERA




CODICE CODE	MISURA SIZE	PN Bar	øA	B min	B max	C	D	E	F	SW	Box Crt
S0161C04	1/2" (DN15)	25	15	25,5	42,5	17	101	49	9,5	26	6/24
S0161C05	3/4" (DN20)	25	20	30	45	15	104	58,5	11	31	4/20
S0161C06	1" (DN25)	25	25	35	52	17	113	69	11,5	39	4/20

Valvola a sfera da incasso a passaggio totale, femmina/femmina con manopola, cromata.
Full bore ball valve for wall built-in installation, with knob, chrome-plated, standard line.

S0162 INCAS 2



ERA



CODICE CODE	MISURA SIZE	PN Bar	øA	B	C min.	C max	D	E min	E max	F	SW	Box Crt
S0162C04	3/4" (DN20)	25	20	58,5	30,5	55	24,5	80,5	105	11	31	6/30
S0162C05	1" (DN25)	25	25	69	36	59	23	86	109	11,5	39	4/20

Valvola a sfera da incasso a passaggio totale, femmina/femmina con cappuccio chiuso, cromata.
Full bore ball valve for wall built-in installation, with cap, chrome-plated.

S0170 INCAS - INCAS 2



ERA

CODICE CODE	MISURA SIZE	-	Box Crt
S0170C04	1/2" (DN15)	-	1/2

Kit di prolunga per leva e manopola, cromato per art. S.0160-S.0161 e S.0163-S.0164.
Extension kit for lever and knob, for S0160, S0161, S0163 and S0164 chrome-plated.

S0171 INCAS 2



ERA

CODICE CODE	MISURA SIZE	-	Box Crt
S0171C04	1/2" (DN15)	-	1/2

Kit di prolunga, cromato per art. S.0162.
Extension kit for lever and knob, for S0162, chrome-plated.

